



# ASOP Resources Relative to Verisk/AIR Catastrophe Models

**Provided to Verisk's Actuarial Clients**

Release Date: January 2022

## Copyright

2022 Verisk Extreme Event Solutions. All rights reserved.

Information in this document is subject to change without notice. No part of this document may be reproduced or transmitted in any form, for any purpose, without the express written permission of Verisk.

## Trademarks

Verisk is a registered trademark. Please refer to the following link for an up-to-date list of Verisk trademarks, <https://www.air-worldwide.com/Legal/Trademarks/>.

In accordance with international patent conventions and treaties, if you use these trademarked items in any document you must also include the trademark symbol and prominently acknowledge Verisk as the owner of the trademarks.

Verisk Extreme Event Solutions is a Verisk Analytics (Nasdaq:VRSK) business.



## Confidentiality

Verisk invests substantial resources in the development of its models, modeling methodologies and databases. This document contains proprietary and confidential information and is intended for the exclusive use of Verisk clients who are subject to the restrictions of the confidentiality provisions set forth in license and other nondisclosure agreements.

## Contact Information

Verisk Extreme Event Solutions is headquartered in Boston with additional offices in North America, Europe, and Asia. For information on our office locations, visit <https://www.air-worldwide.com/about-air/Offices/>.

# Table of Contents

|   |   |                                     |
|---|---|-------------------------------------|
| 1 | Introduction .....  | 1                                   |
| 2 | Model Overview .....  | 3                                   |
|   | Verisk Model Framework .....  | 3                                   |
|   | Key Scientific Resources for Model Inputs .....                                     | 4                                   |
|   | Reliance on Experts .....   | 4                                   |
|   | Model Updates .....   | 5                                   |
|   | Model Validation .....  | 6                                   |
|   | Model Standards Certification .....   | 7                                   |
|   | Model Documentation .....   | 8                                   |
|   | Model Descriptions .....  | 8                                   |
|   | Verisk Terrorism Model .....  | <b>Error! Bookmark not defined.</b> |
|   | Other Topics of Interest to Aid Understanding of Verisk Models .....                | 14                                  |
|   | Developing the Verisk Industry Exposure Databases .....                             | 14                                  |
|   | Damage Function Development .....   | 16                                  |
|   | Estimating Business Interruption Losses .....                                       | 16                                  |
|   | Fire Following Earthquake .....   | 16                                  |
|   | Liquefaction .....  | 17                                  |
|   | Landslide .....   | 18                                  |
|   | Tsunami .....   | 18                                  |
|   | Storm Surge .....   | 19                                  |
|   | Hurricane Induced Inland Precipitation .....  | 20                                  |
|   | Demand Surge .....  | 20                                  |
|   | Other Resources to Aid Understanding of Verisk Models .....                         | 20                                  |
| 3 | Model Uncertainty and Model Limitations .....                                       | 22                                  |
|   | Model Uncertainty .....   | 22                                  |
|   | Modeled and Non-Modeled Perils .....  | 23                                  |
|   | Other Non-Modeled Sources of Loss .....   | 23                                  |
|   | Limitations with Respect to Lines of Business, Occupancy Classes and Coverage ..... | 24                                  |
| 4 | Data Input .....  | 26                                  |
|   | Exposure Data Elements .....  | 26                                  |
|   | Importing Exposure Data into Verisk Software .....                                  | 27                                  |
|   | Understanding Data Uncertainties and Performing Data Quality Checks .....           | 27                                  |
|   | Dealing with Gaps in Data and Augmenting Data Quality .....                         | 28                                  |
| 5 | Model Output .....  | 29                                  |
|   | List of Common Model Output .....   | 29                                  |
|   | The Full Probability Distribution of Losses (EP Curve) .....                        | 29                                  |
|   | Event Loss Summary Detail Table .....   | 30                                  |
|   | Average Annual Loss .....   | 30                                  |
|   | Event Footprints .....  | 31                                  |
|   | Estimates of Uncertainty .....  | 31                                  |
|   | Independent Tests on Data Output .....  | 32                                  |
|   | Testing Sensitivity to Alternative Catalogs .....                                   | 32                                  |
|   | Validation of Company Claim Information Using Historical Events Set .....           | 32                                  |

|   |   |    |
|---|---|----|
|   | Reasonability Test Using Industry Exposure.....             | 33 |
|   | Common Sensitivity Tests .....                              | 34 |
|   | Additional Tests .....                                      | 35 |
| 6 | Appropriate Use of Model Output .....                       | 36 |
|   | Common Uses of Model Output .....                           | 36 |
|   | Best Practices for Decision Making Using Model Output ..... | 37 |
| 7 | Documentation .....   | 39 |

## List of Figures

|           |  |    |
|-----------|--|----|
|           | Exceedance Probability Curve .....                               | 29 |
|           | One Sample Hurricane Event Map .....                             | 31 |
|           | Primary and Secondary Uncertainty in the Model Architecture..... | 32 |
| Figure 1. | Reasonability Test Using Industry Exposure.....                  | 33 |
| Figure 2. | County Level Reasonability Test .....                            | 34 |
| Figure 3. |  |    |
| Figure 4. |  |    |
| Figure 5. |  |    |

## List of Tables

|          |  |   |    |
|----------|--|---|----|
| Table 1. | 9 .....  | Links to Model Description Documents Available Online ..... | 9  |
| Table 2. | Industry Exposure Database Documentation .....                 |   | 14 |
| Table 3. | Touchstone Event Loss Summary Table Detailed Information ..... |   | 30 |

# 1 Introduction

Actuarial Standards of Practice (ASOPs), which apply to actuaries rather than models, allow the use of models only if the actuary carries out certain responsibilities intended to optimize professional judgment. The five U.S.-based actuarial organizations have Codes of Professional Conduct that require their members to satisfy applicable actuarial standards of practice (ASOPs) when providing actuarial services. ASOPs are authoritative guidance for actuaries practicing in the U.S. and are issued by the Actuarial Standards Board (ASB). Actuaries involved in international practice may want to consider reviewing the following document

[www.actuary.org/files/imce/InternationalPractice.pdf](http://www.actuary.org/files/imce/InternationalPractice.pdf). Actuaries using Verisk's Extreme Event Models should be aware of all applicable SOPs with particular attention given to ASOP 38 *Catastrophe Modeling*. ASOPs 23 *Data Quality* and 56 *Modeling* should be reviewed concurrently.

## ASOP 38 Catastrophe Modeling

Effective December 2021, the ASB published a significant revision to ASOP 38 titled *Catastrophe Modeling*. The following is a list of notable changes from the prior ASOP 38 *Using Models Outside the Actuary's Area of Expertise*:

1. The ASOP was revised to apply to all practice areas but to catastrophe models only.
2. The scope was expanded to include the activities "selecting, reviewing, and evaluating" models in addition to the existing activity of "using" a model when performing actuarial services.
3. The scope was expanded to clarify that if the actuary determines that the guidance in the ASOP conflicts with the guidance in ASOP No. 56 *Modeling*, the guidance of this ASOP will govern.
4. A new section specifically addressing reliance on data or other information supplied by others (section 3.8) was added.
5. The guidance on documentation (section 3.9) was updated and expanded to be consistent with current ASOPs.

The new ASOP 38, *Catastrophe Modeling*, enumerates the five basic responsibilities of actuaries selecting, using, reviewing, or evaluating a catastrophe model developed by experts. The actuary should:

1. Determining the appropriate reliance on experts
2. Have a basic understanding of the model
3. Evaluate whether the model is appropriate for the intended application
4. Determine that appropriate validation of the model and output has occurred
5. Determine the appropriate use of the model and output

ASOP 23 *Data Quality* addresses the recommended practices for dealing with data in the following areas:

- Data selection: Select the data with due consideration of appropriateness, reasonableness, comprehensiveness, limitation, and cost of feasibility of alternative data
- Use of imperfect data: Actuary should first decide on whether to use the data (Are the biases in the results of the study material?) and then document the bias as well as potential adjustment to the data
- Reliance on data supplied by others: Actuary should, when practicable, review the data for reasonableness and consistency

Other ASOP standards (ASOP 39, ASOP 41, ASOP 56, etc.) are also relevant to the actuary's use of catastrophe models. All Actuarial Standards of Practice can be found to the following link:

[www.actuarialstandardsboard.org/standards-of-practice/](http://www.actuarialstandardsboard.org/standards-of-practice/). These dictums clearly imply that the actuary must do a fair amount of homework when relying on model results to support rate filings or for any other risk management decisions. Simply filing rates to regulators and the public solely with “the model said so” meets neither actuarial standards of practice nor regulatory rules in most states.

The purpose of this document is to provide a summary resource to assist actuaries in their use of our models—which are outside their area of expertise—as well as identify relevant considerations for conforming to the ASOPs.

## 2 Model Overview

Catastrophe models consist of software applications embodying scientific relationships among physical events, the vulnerability of structures, and economic and insurance conditions. They use computing power to generate tens of thousands of simulated years of potential loss experience for any property data set presented to the models, essentially eliminating pure randomness caused by insufficient sample sizes. Beyond the "convergence" argument, there are other actuarial advantages to using modeled loss data:

- Current inventories of properties, replacement values, and policy conditions are inherently reflected in the model results to the extent they are reflected in the exposure data.
- The full statistical distribution of potential losses is returned by the model, not simply a "best estimate" based on a combination of historical data and selected adjustment factors.
- Sensitivity testing of the modeled losses to various assumptions about exposures, property attributes, and characteristics of the events is straightforward and transparent.

ASOP 38, Section 3.3.1, dictates that *"the actuary should be familiar with the basic components of the model and have a basic understanding of how such components interrelate within the model"*. This chapter aims to provide the actuary with the background and resources necessary to become reasonably familiar with Verisk catastrophe models.

### Verisk Model Framework

The figure below illustrates the component parts of Verisk catastrophe models:

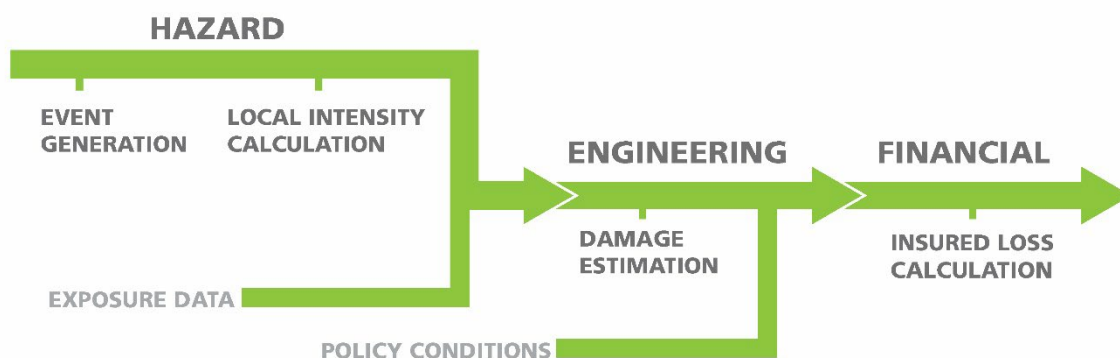


Figure 1 Catastrophe Model Components

This first model component, event generation, addresses the hazard itself and answers the questions of where events are likely to occur, how large or severe they are likely to be, and how frequently they are likely to occur. Verisk employs a large multi-disciplinary team of scientists, which includes meteorologists, climate scientists, seismologists, geophysicists, and statisticians, who combine their knowledge of the underlying physics of natural hazards with the historical data on past events.

At the end of the event generation process, a large catalog of tens of thousands of potential future events is created in accordance with their relative frequency of occurrence—not just events of average frequency but also the most extreme and rare events that make up the tail of the statistical distribution.

Once the model probabilistically generates a potential future event, it propagates the event across the affected area. For each location within the affected area, local intensity (e.g., wind speed, ground motion) is estimated. High resolution geophysical data and algorithms are employed to model the local effects of each simulated event at each affected site.

In the damage estimation component, the local intensities of each simulated event are superimposed onto a database of exposed properties which are input by the user. Mathematical relationships, called damage functions, describe the relationship between the intensity of the event, which varies by location, and the expected damage ratio to the exposed buildings and contents to produce estimates of the resulting monetary damage when applied to replacement cost estimates. Verisk employs experienced structural engineers who develop damage functions for many different construction types and occupancies for building, contents, and time element loss.

In the last component of the model, insured losses are calculated by applying the specific policy conditions to the total damage estimates. Policy conditions may include deductibles by coverage, site- specific or blanket deductibles, coverage limits and sub-limits, coinsurance, attachment points and limits for single or multiple location policies, and risk or policy specific reinsurance terms. Explicit modeling of uncertainty in both intensity and damage calculations enables a detailed probabilistic calculation of the effects of policy conditions.

Each component, or module, represents both the analytical work of the multi-disciplinary research team that is responsible for its design and the complex computer programs that run the simulations. The ongoing research of the scientists and engineers ensures that Verisk models reflect the latest advances in scientific understanding. The models undergo a continual process of review, refinement, enhancement, and validation.

## Key Scientific Resources for Model Inputs

Verisk's approach to catastrophe modeling is one of both scientific rigor and transparency. The most important job of our scientists and engineers is to keep abreast of the scientific literature, evaluate the latest research findings, and conduct original research of their own. In doing so, Verisk's highly credentialed research team ensures that our models incorporate the most current scientific knowledge in climate science, meteorology, hydrology, seismology, and wind and earthquake engineering. Throughout the model documentation, relevant data sources used for model development are provided. In light of Solvency II, ASOP and other regulatory requirements, Verisk provides a consolidated section on data sources, available in the section "Facts-at-a-Glance" in each model description documents.

The data sources that are used to develop the industry exposure database can be found in the Touchstone Re section of the model description documents. They are also provided in the Verisk Industry Exposure Database documents.

## Reliance on Experts

Determining the appropriate level of reliance on experts is important for ASOP compliance. Per ASOP 38, Section 3.2 *Catastrophe Models Developed by Experts*, the actuary may rely on experts in the field in the evaluation of catastrophe models. This section goes on to explain that actuaries who plan to rely on the use of catastrophe models should consider "*whether the individual or individuals that developed the catastrophe model are experts in the applicable field*" and also "*the extent to which the catastrophe model has been reviewed or validated by experts in the applicable field*". Section 3.2.c also discusses the actuary's responsibility to, "*whether there are industry or regulatory standards that apply to the catastrophe model or to the testing or validation of the catastrophe model, and whether the catastrophe model has been certified as having met such standards*".

Verisk employs a large, full-time professional staff in actuarial science, computer science, insurance and reinsurance, geology, mathematics, meteorology, hydrology and other physical sciences, software engineering, statistics, and structural engineering, among other disciplines. Most have advanced degrees with approximately 100 holding Ph.Ds. Verisk scientists and researchers apply general accepted practice in their specific discipline in model creation and validation. Verisk's diverse team of experts continually strives to improve the accuracy and realism of catastrophe models. However, catastrophe modeling will always remain an inexact science and there are inherent uncertainties and assumptions throughout the model development process. Verisk is committed to explaining all known sources of uncertainty and how they are treated within the models in our detailed technical documentation.



For particular areas of inquiry or less well-studied regions of the world that lack ample historical data, model development requires the use of expert scientific judgment. In some situations, Verisk supplements in-house knowledge with external expertise using consultants or peer reviewers. For example, Verisk has solicited external expertise on such topics as the impact of climate change on tropical cyclone activity, frequency estimates for assessing terrorism risk, and pandemic flu, among others.

For ongoing areas of research where there is no clear scientific consensus, Verisk seeks to provide clients with guidance and modeling best practices in the form of white papers, briefs and, in some cases, alternate credible views of the risk.

A complete listing of individuals who have contributed significantly to the U.S. Hurricane Model development, enhancement, testing and/or validation can be found in the Florida Commission for Hurricane Loss Projection Methodology, [Latest Submission Documentation](#) (pgs.40-59).

Credentials and background of experts who have contributed to the development of Verisk models can be made available upon request.

## Model Updates

Model updates are not undertaken frivolously at Verisk and indeed a critical decision is when to incorporate a new scientific theory or new data. Rarely is a model update at Verisk prompted by a single event or even multiple events. On the other hand, as events occur, Verisk engineers have access to more—and more detailed—loss experience data. Analysis of that data is used for both validation and calibration of the Verisk models, particularly of their damage functions. Verisk Extreme Event Solutions also has the benefit of leveraging actual loss information from other subsidiaries across Verisk Analytics. Where available, modeled losses are extensively validated against loss estimates issued by Verisk ISO's Property Claims Services (PCS) and against claims data received from Verisk Xactware.

Very generally, catastrophe models are updated for four primary reasons: 1) refinements to damage functions based on data from actual events, as noted above; 2) new scientific research; 3) enhanced and higher resolution geophysical databases; 4) the addition of sources of loss not previously modeled. Below are some examples of Verisk models that were updated due to these reasons. This list is not exhaustive but meant to convey how Verisk determines when to significantly update a model or release a new one. For further discussion of the issues surrounding when catastrophe modelers incorporate new science, see the *AIR Current* [Modeling Fundamentals: The Dynamic Nature of Science in Catastrophe Modeling](#).

In 2014, new findings by the wider scientific and engineering communities provided motivation for enhancements to the Verisk Earthquake Model for the United States. The release featured comprehensive enhancements to virtually all model components, prompted in large part by the United States Geological Survey publication, [Documentation for the 2014 Update of the United States National Seismic Hazard Maps](#). Sub-perils and additional model refinements were implemented in 2018. In 2017, the Verisk Hurricane Model for the United States was updated to reflect the incorporation of damage functions including updated building codes and enforcement levels and their effect on vulnerability. In 2018, the Verisk Wildfire Model for the United States was expanded to states beyond California along with an enhancement of the hazard module. The 2020 Verisk Hurricane Model for the United States reflects updates to the historical catalog and the resultant impact on the stochastic catalog as well as standard vulnerability updates reflecting the aging of the building stock. The local intensity now includes inland precipitation flood identical to the U.S. Inland Flood model, but stemming from hurricane induced precipitation flooding. A separate model version is applicable to Florida, which is detailed at [FAQ: Which Versions of AIR's Models are Submitted to State Regulators?](#)

The availability of better data at an ever-higher resolution is a result, in some measure, of the almost exponential increase in computing power over recent years. In turn, increases in computing power have enabled catastrophe modelers to incorporate this data without sacrificing model runtimes. Utilizing new algorithms for disaggregating exposure information to a high-resolution grid level makes real sense only when the hazard can be modeled at a very high geophysical resolution (using, for example, high resolution soil, elevation, topographic data, and the like). The 2014 update of the Verisk Severe Thunderstorm Model for the United States features a high-resolution

industry exposure database (along with the ability for clients to disaggregate their own exposure to high resolution) that takes full advantage of high-resolution hazard modeling. The additional level of detail enables better differentiation between risks, which in turn leads to better risk management practices and decisions that better align with strategic goals.

The explicit incorporation of previously unmodeled perils also motivates model updates. For example, as the influence of climate plays a more critical role in our clients' decision-making processes, Verisk has proactively begun quantifying the implications of climate in its models. The highly active 2004 and 2005 hurricane seasons in the North Atlantic, prompted Verisk to introduce an alternative view of hurricane risk in the form of the Verisk Warm Sea Surface Temperature (WSST) catalog to represent a long-term climatology of hurricane activity conditioned on those years since 1900 in which the Atlantic Ocean has been warmer than average. For a general discussion of the issue of incorporating a changing climate in Verisk models see the white papers: [Quantifying the Impact of Climate Change on US Hurricane](#) ; [Catastrophe Modeling in an Environment of Climate Change](#), [Climate Change Impacts on Extreme Weather](#), [Financial Implications of Climate Change](#). The technical documents contained in the current year's releases include a new section with technical discussions of the effects of climate change on modeling solutions. More information on climate change impacts and resources can be found at [Risks: Climate Change](#).

Another example is the ongoing research on tsunami and landslide risk. The data from the tsunami that was generated from the 2011 Tohoku earthquake are incorporated into the 2013 update to the Verisk Earthquake Model for Japan, which features explicit modeling of tsunami generation and damage. These data were also a major contributor towards including explicit tsunami modeling in the update to the Verisk Earthquake Model for Canada, which was released in 2014. The landslide and tsunami sub-perils were added to the Verisk Earthquake Model for the United States in 2017.

While Verisk fully understands that model updates can be challenging, they can also present opportunities. Ultimately, Verisk is confident that our clients benefit from a more robust and accurate view of risk provided by the model updates. [Scope of Model and Software Updates 2021](#) and [Scope of Model and Software Updates Touchstone and Touchstone Re 2022](#) provide comprehensive listings of Verisk model updates in 2021 and 2022 respectively.

The new Touchstone financial engine will impact all models. In addition, Verisk has updated two models for 2022 – the Verisk Severe Thunderstorm Model for the United States and the Verisk Crop Hail Model for the United States. The 2022 model updates are planned to be released in June.

## Model Validation

Actuaries that plan to rely on the use of catastrophe model output should ensure that the appropriate validation has been performed on the model. Section 3.3.1 of ASOP 38 states, *"the actuary should also be familiar with how the catastrophe model was tested or validated and the level of independent expert review and testing."*

Each component of the Verisk catastrophe models represents both the analytical work of the multi-disciplinary research team that is responsible for its design and the complex computer programs that run the simulations. The ongoing research of scientists and engineers at Verisk ensures that the models reflect the latest advances in scientific understanding. The models undergo a continual process of review, refinement, enhancement, and validation.

Verisk's validation process is not limited to the final model results. Throughout the model development process, every component is carefully verified against data from historical events. Of course, the goal of catastrophe models is not simply to replicate the historical record; rather, the model should reflect the full range of potential future catastrophe experience, including the most extreme events that may not have occurred historically. Therefore, it is critical that the model be vetted and validated by the domain experts—both internal and external—for each model component to ensure reasonability.

It is important to point out that model validation is at its most robust for regions where the modeled peril is relatively frequent, and hence historical data are relatively abundant. For regions that experience catastrophes only rarely, the modeler is left to extrapolate from other regions where event frequency is higher and rely more

heavily on expert judgment. In the case of the New Madrid Seismic Zone of the United States, for example, there has been only one event in the historical record of any significance from an insurance perspective (the series of three large earthquakes that occurred in the winter of 1811-1812). Seismicity in this intraplate region is still not well understood; however, hundreds of seismologists in the U.S. Geological Survey and academic and other research institutions continue to study the region and publish their findings regarding its potential to produce future damaging earthquakes. This research is, of course, incorporated in the Verisk model. Still, it must be acknowledged that there is considerable uncertainty surrounding estimates of modeled loss for this and similar regions of low seismicity.

Similarly, model validation is more robust in regions where there is an established and mature insurance market and thus abundant claims data with which to validate modeled losses—and detailed claims data. Validation of the modeled losses for the Verisk Earthquake Model for Japan, for example, will be more robust than validation of modeled losses for the Verisk Earthquake Model for China, even though earthquakes occur relatively frequently in China. This situation will undoubtedly change as China's insurance market grows and matures. In general, the claims data used by Verisk for both model calibration and validation are most abundant in the United States, Europe, and Japan—and for wind (i.e., more frequent) perils. Claims data may also significantly increase after events of extreme significance, such as the 2011 M9.0 earthquake in Tohoku, Japan.

In regions for which claims data are not abundant, there is necessarily more heavy reliance on published estimates of industry and economic losses. In addition, Verisk engineers leverage the extensively validated damage functions from other, more mature insurance markets and then modify them to reflect local conditions, including the age of the building stock, local design and seismic codes, local construction practices, socio-economic circumstances and claims adjustment practices.

Several sections in the Verisk model documentation are devoted to a discussion of model validation. These include:

- Validating Stochastic Event Generation
- Validating Local Intensity
- Validating Damage Functions
- Validating Modeled Losses

For additional information on the model validation process, including examples from several Verisk models, refer to the document [AIR Approach to Model Validation](#). Note that documented examples represent only a fraction of the validation exercises undertaken during model development.

## Model Standards Certification

Relevant to ASOP 38, Section 3.2.c, the actuary should consider *“whether there are industry or regulatory standards that apply to the catastrophe model or to the testing or validation of the catastrophe model, and whether the catastrophe model has been certified as having met such standards.”*

Verisk has worked with insurance departments of various states in meeting their informational requirements. Rates based on the Verisk models have been filed and approved in an increasing number of states.

Documentation related to compliance with the standards of the following organizations is available upon request:

- Florida Commission for Hurricane Loss Projection Methodology
- Louisiana Department of Insurance
- Hawaii Department of Insurance
- South Carolina Department of Insurance

Additional information is available at the following links: [FAQs: Which Versions of AIR's Models are Submitted to State Regulators?](#), [Florida Commission Hurricane Loss Projection Methodology](#). For more information on individual state practices please contact our regulatory division.

## Model Documentation

Verisk's model documentation includes details on the science and engineering incorporated in each model, data sources used in the model's development, exhibits, and discussion surrounding model validation. Also included are details on the model's implementation in Verisk software, including supported lines of business, coverages, construction and occupancy types, supported age and height bands where applicable, and lengthy tables providing the relative vulnerabilities of supported construction types.

As part of an on-going effort to continue improving its model documentation, Verisk has started providing these tables in separate Excel files, allowing clients to directly access the data as needed. These Excel files will be provided as model documents are updated, or new ones created, and will be accessible directly by means of a link in the Touchstone® section of the model description documents (described below).

## Model Descriptions

Verisk's model documents provide linked tables of contents and a bookmark panel for easy navigation. They are organized into sections that reflect the components of the model in a logical order allowing users to easily follow the development of the hazard and vulnerability aspects of the model. This organization is summarized below.

The "Facts at a Glance" section provides an overview of the model, including modeled perils and sub perils, a model abstract, data sources used for model development, summary statistics on the stochastic catalog, and modeled losses for key exceedance probabilities and significant historical events.

The model documents include an overview of the modeled peril, with particular reference to the modeled country or region. In addition, summary information about significant historical events is provided.

The "Event Generation" section identifies the model parameters that define an event, and any explicitly modeled sub perils, and details the generation of the simulated events that populate the stochastic catalog. "Local Intensity Calculation" identifies the intensity parameters used in the model and describes how the intensity, of perils and explicitly modeled sub perils, is modeled at each affected site.

The "Damage Estimation" section discusses the model's damage functions for all the modeled peril and sub perils. In some cases, there may be an additional section devoted to damage estimation, either for complex industrial facilities or other specialized lines of business; otherwise, "Insured Loss Calculation," provides an overview of the model's financial module.

Finally, model documents provide information on the implementation of the model in Touchstone and Touchstone Re, respectively and offer selected references used in model development.

The following tables provide links to model description documents currently available on the [Client Portal](#).<sup>1</sup> Note the 2022 release will include Verisk's Next Generation Models (NGM). Preliminary test versions were available for various perils in 2021. More information on NGM is available at the following links [Advancing the Science of Risk Analysis](#), [Introducing AIR's Next Generation Models \(NGM\)](#), and [NGM webinar series](#) as well as additional information on [the NGM page](#).

---

<sup>1</sup> All documents on the Verisk website are available to logged-in clients by clicking **Documentation and Downloads** from the [Client Portal](#) or by entering all or part of the title in the Search Box.

Table 1. Links to Model Description Documents Available Online

**CROP**

| <b>Multiple Peril Crop Insurance (MPCI)</b> |  |
|---|--|
| Mainland China                              | <a href="#">Verisk Multiple Peril Crop Insurance Model for China</a>                                   |
| Canada                                      | <a href="#">Verisk Multiple Peril Crop Insurance (MPCI) Model for Canada</a>                           |
| India                                       | <a href="#">Verisk Multiple Peril Crop Model (MPCI) for India</a>                                      |
| United States—Contiguous U.S.               | <a href="#">Verisk Multiple Peril Crop Insurance (MPCI) Model for the United States</a>                |
| <b>Crop Hail</b>                            |  |
| Canada                                      | <a href="#">Verisk Crop Hail Model for Canada</a>  |
| United States—Contiguous U.S.               | <a href="#">Verisk Crop Hail Model for the United States, Scope of Model Updates 2022-US Crop Hail</a> |

**CYBER**

| <b>Cyber Risk</b>                  |
|------------------------------------|
| <a href="#">Verisk Cyber Model</a> |

**EARTHQUAKE**

| <b>Asia-Pacific</b>  |  |  |
|--|--|--|
| Australia  |  | <a href="#">Verisk Earthquake Model Australia</a>  |
| Brunei<br>Hong Kong<br>Indonesia<br>Macau  | Malaysia<br>Singapore<br>Taiwan  | Thailand<br>the Philippines<br>Vietnam<br><a href="#">Verisk Earthquake Model for Southeast Asia</a>   |
| Mainland China   |  | <a href="#">Verisk Earthquake Model for Mainland China</a>   |
| India  |  | <a href="#">Verisk Earthquake Model for India</a>  |
| Japan  |  | <a href="#">Verisk Earthquake Model for Japan</a>  |
| New Zealand  |  | <a href="#">Verisk Earthquake Model for New Zealand</a>  |
| <b>Caribbean</b>   |  |  |
| Anguilla<br>Antigua and Barbuda<br>Aruba<br>Bahamas<br>Barbados<br>Bermuda<br>British Virgin Islands<br>Cayman Islands | Dominica<br>Dominican Republic<br>Grenada<br>Guadeloupe<br>Haiti<br>Jamaica<br>Martinique<br>Montserrat<br>Netherlands BES | Saint Barthélemy<br>Saint Kitts and Nevis<br>Saint Lucia<br>Sint Maarten<br>Saint Martin<br>Saint Vincent and the Grenadines<br>Trinidad and Tobago<br><a href="#">Verisk Earthquake Model: Caribbean Region</a> |

|   |  |  |   |
|---|--|--|---|
| Cuba<br>Curaçao   | (Bonaire, St.<br>Eustatius, Saba)<br>Puerto Rico   | Turks and<br>Caicos<br>U.S. Virgin<br>Islands  |   |
| <b>Central America</b>  |  |  |   |
| Belize<br>Costa Rica<br>El Salvador   | Guatemala<br>Honduras  | Nicaragua<br>Panama  | <a href="#">Verisk Earthquake Model for Central America</a>         |
| <b>Europe and the Middle East</b>   |  |  |   |
| Austria<br>Belgium<br>Bulgaria<br>Cyprus<br>Czech Republic<br>Denmark<br>Estonia<br>Finland<br>France (including<br>Monaco) | Germany<br>Greece<br>Hungary<br>Ireland<br>Israel<br>Italy<br>Latvia<br>Lithuania<br>Luxembourg<br>Netherlands | Norway<br>Poland<br>Portugal<br>Romania<br>Slovakia<br>Slovenia<br>Sweden<br>Switzerland<br>Turkey<br>United Kingdom | <a href="#">Verisk Earthquake Model for the Pan-European Region</a> |
| Albania   | Macedonia  | Serbia<br>(excluding<br>Kosovo)  | <a href="#">Verisk Earthquake Model for the Southeast Europe</a>    |
| <b>North America</b>  |  |  |   |
|   | Alaska   |  | <a href="#">Verisk Earthquake Model for Alaska</a>                  |
|   | Canada   |  | <a href="#">Verisk Earthquake Model for Canada</a>                  |
|   | Hawaii   |  | <a href="#">Verisk Earthquake Model for Hawaii</a>                  |
|   | Mexico   |  | <a href="#">Verisk Earthquake Model for Mexico</a>                  |
|   | United States—Contiguous U.S.  |  | <a href="#">Verisk Earthquake Model for the United States</a>       |
| <b>South America</b>  |  |  |   |
|   | Chile  |  | <a href="#">Verisk Earthquake Model for Chile</a>                   |
|   | Colombia   |  | <a href="#">Verisk Earthquake Model for Colombia</a>                |
|   | Ecuador  |  | <a href="#">Verisk Earthquake Model for Ecuador</a>                 |
|   | Peru   |  | <a href="#">Verisk Earthquake Model for Peru</a>                    |
|   | Venezuela  |  | <a href="#">Verisk Earthquake Model for Venezuela</a>               |

## EXTRATROPICAL CYCLONE (WINTER STORM)

|               |
|---------------|
| <b>Europe</b> |
|---------------|

|                               |               |   |   |
|-------------------------------|---------------|---|---|
| Austria                       | Germany       | Norway  | <a href="#">Verisk Extratropical Cyclone Model for Europe</a> |
| Belgium                       | Hungary       | Poland  |   |
| Czech Republic                | Ireland       | Slovakia  |   |
| Denmark                       | Latvia        | Slovenia  |   |
| Estonia                       | Liechtenstein | Sweden  |   |
| Finland                       | Lithuania     | Switzerland   |   |
| France (including Monaco)     | Luxembourg    | United Kingdom  |   |
|                               | Netherlands   |   |   |
|                               |               |   |   |
| North America                 |               |   |   |
| Canada                        |               | <a href="#">Verisk Winter Storm Model for Canada</a>            |   |
| United States—Contiguous U.S. |               | <a href="#">Verisk Winter Storm Model for the United States</a> |   |

**FLOOD, COASTAL**

|                               |   |
|-------------------------------|---|
| <b>Europe</b>                 |   |
| Great Britain—integrated with | <a href="#">Verisk Extratropical Cyclone for Europe</a> |
| Great Britain                 | <a href="#">AIR Coastal Model for Great Britain</a>     |

**FLOOD, INLAND**

|   |   |
|---|---|
| <b>Europe and North America</b>                       |   |
| Austria, Czech Republic, Germany, Poland, Switzerland | <a href="#">Verisk Inland Flood Model for Central Europe</a>    |
| Great Britain—England, Scotland, Wales                | <a href="#">Verisk Inland Flood Model for Great Britain</a>     |
| Albania, Macedonia, Serbia                            | <a href="#">Verisk Inland Flood Model for Southeast Europe</a>  |
| United States—Contiguous U.S.                         | <a href="#">Verisk Inland Flood Model for the United States</a> |
| <b>Asia-Pacific</b>                                   |   |
| Japan   | <a href="#">Verisk Inland Flood Model for Japan</a>             |

**EXCESS MORTALITY**

|  |  |
|--|--|
| <b>Global</b>                              |  |
| South Korea, United Kingdom, United States | <a href="#">Verisk Life Risk Model</a> |

**PANDEMIC**

| Global  |                |                                       |
|---|----------------|---------------------------------------|
| Australia   | Japan          | <a href="#">Verisk Pandemic Model</a> |
| Canada  | United Kingdom |                                       |
| France  | United States  |                                       |
| Germany   |                |                                       |
| <i>The Verisk Pandemic model includes excess morbidity and mortality from outbreaks caused by influenza viruses, coronaviruses, filoviruses, Rift Valley fever virus, Crimean-Congo hemorrhagic fever virus, Lassa fever virus, Vibrio cholerae, Yersinia pestis (plague), and Neisseria meningitidis (meningococcal meningitis).</i> |                |                                       |



*Verisk has the added capability, on a consulting service basis, of analyzing pandemic flu risk in other countries. All supported countries are listed in Section 11 of the model description document.*

## SEVERE THUNDERSTORM (TORNADOES, HAIL, STRAIGHT-LINE WIND)

| Asia-Pacific                  |               |   |
|-------------------------------|---------------|---|
| Australia                     |               | <a href="#">Verisk Severe Thunderstorm Model for Australia</a>  |
| North America                 |               |   |
| Canada                        |               | <a href="#">Verisk Severe Thunderstorm Model for Canada</a>   |
| United States—Contiguous U.S. |               | <a href="#">Verisk Severe Thunderstorm Model for the United States</a><br><a href="#">Re-accessing the hazard of severe thunderstorm risk</a> |
| Europe                        |               |   |
| Austria                       | Germany       | Norway  |
| Belgium                       | Hungary       | Poland  |
| Czech Republic                | Ireland       | Slovakia  |
| Denmark                       | Latvia        | Slovenia  |
| Estonia                       | Liechtenstein | Sweden  |
| Finland                       | Lithuania     | Switzerland   |
| France (including Monaco)     | Luxembourg    | United Kingdom  |
|                               | Netherlands   |   |
|                               |               | <a href="#">Verisk Severe Thunderstorm Model for Europe</a>   |

## TERRORISM

| North America   |   |
|---|---|
| United States   | <a href="#">Verisk Terrorism Model</a> <a href="#">Terrorism Model Release Information</a><br><a href="#">Federal Insurance Office Terrorism Risk Insurance Program Data Call Information</a> |
| <p><i>The Verisk Terrorism Model has a model domain for the deterministic terrorism module that includes 28 countries (Australia, Belgium, Brazil, Canada, China, Colombia, France, Germany, Greece, India, Indonesia, Ireland, Israel, Italy, Japan, Kenya, Lebanon, Mexico, Netherlands, Philippines, Russia, Singapore, South Africa, Spain, Thailand, Turkey, United Kingdom, and the United States).</i></p> <p><i>Analyzing terrorism risk in any country is available on a consulting service basis.</i></p> |   |

## TROPICAL CYCLONE (HURRICANE, TYPHOON)

| Asia-Pacific   |   |
|--|---|
| Australia  | <a href="#">Verisk Tropical Cyclone Model for Australia</a> |
| Mainland China   | <a href="#">Verisk Typhoon Model for Mainland China</a>     |
| Guam, Hong Kong, Macau, Philippines, Saipan, Taiwan, and Vietnam | <a href="#">Verisk Typhoon Model for Southeast Asia</a>     |



|                                       |                                     |   |   |
|---------------------------------------|-------------------------------------|---|---|
| India                                 |                                     | <a href="#">Verisk Tropical Cyclone Model for India</a>         |   |
| Japan                                 |                                     | <a href="#">Verisk Typhoon Model for Japan</a>                  |   |
| South Korea                           |                                     | <a href="#">Verisk Typhoon Model for South Korea</a>            |   |
| Caribbean and Bermuda                 |                                     |   |   |
| Anguilla                              | Dominican Republic                  | St. Kitts and Nevis   | <a href="#">Verisk Tropical Cyclone Model for the Caribbean</a>   |
| Antigua and Barbuda                   | Granada                             | St. Lucia   |   |
| Aruba                                 | Guadeloupe                          | St. Maarten   |   |
| Bahamas                               | Haiti                               | St. Martin  |   |
| Barbados                              | Jamaica                             | St. Vincent and the Grenadines                                  |   |
| Bermuda                               | Martinique                          | Trinidad and Tobago   |   |
| British Virgin Islands                | Montserrat                          | Turks and Caicos Islands  |   |
| Cayman Islands                        | Netherlands                         | U.S. Virgin Islands   |   |
| Cuba                                  | BES (Bonaire, Sint Eustatius, Saba) |   |   |
| Curaçao                               | Puerto Rico                         |   |   |
| Dominica                              | St. Barthélemy                      |   |   |
| Central America                       |                                     |   |   |
| Belize                                | Guatemala                           | Nicaragua   | <a href="#">Verisk Tropical Cyclone Model for Central America</a> |
| Costa Rica                            | Honduras                            | Panama  |   |
| El Salvador                           |                                     |   |   |
| North America                         |                                     |   |   |
| Hawaii                                |                                     | <a href="#">Verisk Tropical Cyclone Model for Hawaii</a>        |   |
| Mexico                                |                                     | <a href="#">Verisk Tropical Cyclone Model for Mexico</a>        |   |
| United States                         |                                     |   |   |
| Alabama                               | Maine                               | Oklahoma  | <a href="#">Verisk Hurricane Model for the United States</a>      |
| Arkansas                              | Maryland                            | Pennsylvania  |   |
| Connecticut                           | Massachusetts                       | Rhode Island  |   |
| Delaware                              | Mississippi                         | South Carolina  |   |
| Florida                               | Missouri                            | Tennessee   |   |
| Georgia                               | New Hampshire                       | Texas   |   |
| Illinois                              | New Jersey                          | Vermont   |   |
| Indiana                               | New York                            | Virginia  |   |
| Kentucky                              | North Carolina                      | Washington  |   |
| Louisiana                             | Ohio                                | D.C.  |   |
|                                       |                                     | West Virginia   |   |
| United States Offshore—Gulf of Mexico |                                     | <a href="#">Verisk U.S. Hurricane Model for Offshore Assets</a> |   |
| Canada                                |                                     | <a href="#">Verisk Tropical Cyclone Model for Canada</a>        |   |

**WILDFIRE**

|                     |  |  |  |
|---------------------|--|--|--|
| <b>Asia-Pacific</b> |  |  |  |
|---------------------|--|--|--|

|               |            |            |   |
|---------------|------------|------------|---|
| Australia     |            |            | <a href="#">Verisk Bushfire Model for Australia</a>         |
| North America |            |            |   |
| United States |            |            |   |
| Arizona       | Nevada     | Texas      | <a href="#">Verisk Wildfire Model for the United States</a> |
| California    | New Mexico | Utah       |   |
| Colorado      | Oklahoma   | Washington |   |
| Idaho         | Oregon     | Wyoming    |   |
| Montana       |            |            |   |
|               |            |            |   |

## Other Topics of Interest to Aid Understanding of Verisk Models

The sections below provide information on topics that our clients have identified as being of particularly interest in their relation to ASOPs.

### Developing the Verisk Industry Exposure Databases

Verisk commits considerable resources to the development and maintenance of the Verisk industry exposure databases (Industry Exposure Databases). The task of compiling and analyzing diverse data sets—risk counts, building characteristics, and construction costs from a host of data sources, in a variety of languages and resolutions, and of different vintages—is both time- and labor-intensive. The Industry Exposure Databases are generally updated concurrent with a model update. Clients should take note of the model and Industry Exposure Database updates each June. One good source for this information is the model release notes posted on the client portal.

All new model documentation provides the data sources and methodologies used to develop the Verisk Industry Exposure Database for that country or countries. A description and summary statistics of the Industry Exposure Database, along with detailed breakdowns of the Industry Exposure Database by construction type, occupancy class, and age and height bands (where they apply) for different countries can be found the documents listed below.

Table 2. Industry Exposure Database Documentation

|                       |             |               |   |
|-----------------------|-------------|---------------|---|
| Australia             |             |               | <a href="#">Verisk Industry Exposure Database for Australia</a>             |
| Canada                |             |               | <a href="#">Verisk Industry Exposure Database for Canada</a>                |
| New Zealand           |             |               | <a href="#">Verisk Industry Exposure Database for New Zealand</a>           |
| Caribbean and Bermuda |             |               |   |
| Anguilla              | Dominica    | Saint         | <a href="#">Verisk Industry Exposure Databases for the Caribbean Region</a> |
| Antigua               | Dominican   | Barthélemy    |   |
| and                   | Republic    | Saint Kitts   |   |
| Barbuda               | Grenada     | and Nevis     |   |
| Aruba                 | Guadeloupe  | Saint Lucia   |   |
| Bahamas               | Haiti       | Sint Maarten  |   |
| Barbados              | Jamaica     | Saint Martin  |   |
| Bermuda               | Martinique  | Saint Vincent |   |
| British               | Montserrat  | and the       |   |
| Virgin                | Netherlands | Grenadines    |   |

|                            |                                    |                     |  |
|----------------------------|------------------------------------|---------------------|--|
| Islands                    | BES (Bonaire, St. Eustatius, Saba) | Trinidad and Tobago |  |
| Cayman Islands             |                                    | Turks and Caicos    |  |
| Cuba                       | Puerto Rico                        | U.S. Virgin Islands |  |
| Curaçao                    |                                    |                     |  |
| Europe and the Middle East |                                    |                     | <a href="#">Verisk Industry Exposure Databases for the Pan-European Region</a> |
| Austria                    | Germany                            | Norway              |  |
| Belgium                    | Greece                             | Poland              |  |
| Bulgaria                   | Hungary                            | Portugal            |  |
| Cyprus                     | Ireland                            | Romania             |  |
| Czech Republic             | Israel                             | Slovakia            |  |
| Denmark                    | Italy                              | Slovenia            |  |
| Estonia                    | Latvia                             | Sweden              |  |
| Finland                    | Liechtenstein                      | Switzerland         |  |
| France (including Monaco)  | Lithuania                          | Turkey              |  |
|                            | Luxembourg                         | United Kingdom      |  |
|                            | Netherlands                        |                     |  |
| India                      |                                    |                     | <a href="#">Verisk Industry Exposure Database for India</a>                    |
| Japan                      |                                    |                     | <a href="#">Verisk Industry Exposure Database for Japan</a>                    |
| South America              |                                    |                     | <a href="#">Verisk Industry Exposure Database for South America</a>            |
| Chile                      | Ecuador                            | Venezuela           |  |
| Colombia                   | Peru                               |                     |  |
| Southeast Asia             |                                    |                     | <a href="#">Verisk Industry Exposure Database for Southeast Asia</a>           |
| Guam                       | Macau                              | Singapore           |  |
| Hong Kong                  | Philippines                        | Taiwan              |  |
| Indonesia                  | Saipan                             | Vietnam             |  |
|                            |                                    |                     |  |
| United States              |                                    |                     | <a href="#">Verisk Industry Exposure Database for the United States</a>        |
|                            |                                    |                     | <a href="#">Verisk Industry Exposure Database for Workers' Compensation</a>    |

Due to the update schedule, some Industry Exposure Databases do not reflect the most current industry exposures; this is particularly true for countries experiencing rapid economic growth. Many of our clients have therefore asked for factors, or indexes, that can be applied to total industry exposure and account for recent changes. Please see the documents at the links below for more information on industry exposure vintage dates and indexing.

[Industry Exposure Indexes](#), [Vintage by Country 2021](#)

## Damage Function Development

---

All model documentation provides information about the development of damage functions for that particular model. However, for an excellent discussion of the complexities involved in the development of damage functions—including engineering expertise, region-specific knowledge of building codes, insurance practices and demographics, abundant damage and claims data, and a little art—and what they are meant to capture, clients are encouraged to read the *AIR Current*: [Modeling Fundamentals - Anatomy of a Damage Function: Dispelling the Myths](#).

## Estimating Business Interruption Losses

---

Over time Verisk has significantly enhanced the methodology by which business interruption losses are calculated with the Verisk Hurricane Model for the United States. In addition to direct business interruption (BI) losses due to loss of business income during the period of restoration, the enhanced damage function now includes indirect business interruption losses stemming from actions taken by civil authorities, loss of business income from dependent properties, and utility service interruption.

Since then, the enhanced modeling of BI losses has been extended to other models and it will continue to be rolled out as models are updated or added, and as the availability of data for validation makes possible its inclusion. In the meantime, those models that support the estimation of BI losses but that do not yet incorporate the new methodology, estimate BI losses arising only from direct physical damage to the structure.

A discussion of the implementation of the enhanced BI calculations is available in Section 5 of the full model documentation. A detailed discussion is also available in the AIR Issue Brief: [Modeling Supply Chain Disruptions and Contingent Business Interruption Losses](#).

## Fire Following Earthquake

---

Currently, the following Verisk models feature a separate Fire Following Earthquake (FFE) module that uses dynamic simulation techniques to estimate fire losses probabilistically:

- [Verisk Earthquake Model for Japan](#)

Fire ignition rates are based on a process similar to that presented in Scawthorn (2009) for events in California. Fire spread is simulated using a cellular automata model that incorporates characteristic city blocks for the country. See Section 5 of the full model documentation for detailed discussions of the methodology used for estimating FFE damage.

- [Verisk Earthquake Model for the United States](#)

Fire ignition rates are based on historical data. Fire spread is simulated using a technique based on the Hamada fire spread model. See Section 5 for detailed discussions of the methodology used for estimating FFE damage.

- [Verisk Earthquake Model for Canada](#)

Fire occurrences are modeled using a dynamic simulation of the fire in the local build environment. The behavior of a fire is simulated for its entire lifespan: from ignition and spread to burnout or suppression. Section 5 contains detailed discussions of the methodology used for estimating FFE damage.

- [Verisk Earthquake Model for New Zealand](#)

See Section 5 contains detailed discussions of the methodology used for estimating FFE damage.

## Liquefaction

---

When an earthquake strikes an area that is saturated with groundwater, the shaking can cause the soil to lose its stiffness due to increased water pressure and behave like a heavy liquid. When this happens, the soil loses its capability to support structures. The following Verisk earthquake models include explicit modeling for liquefaction:

- [Verisk Earthquake Model for the United States](#)  
See Section 4 for detailed discussions of the methodology used to estimate liquefaction intensity. For the methodology used to estimate liquefaction damage, see Sections 5.
- [Verisk Earthquake Model for Japan](#)  
See Section 4 for detailed discussions of the methodology used to estimate liquefaction intensity. For the methodology used to estimate liquefaction damage, see Sections 5.
- [Verisk Earthquake Model for Canada](#)  
See Section 4 for detailed discussions of the methodology used to estimate liquefaction intensity. For the methodology used to estimate liquefaction damage, see Sections 5.
- [Verisk Earthquake Model for India](#)  
See Section 4 for detailed discussions of the methodology used to estimate liquefaction intensity. For the methodology used to estimate liquefaction damage, see Sections 5.
- [Verisk Earthquake Model for Southeast Asia](#)  
The Verisk Earthquake Model for Southeast Asia includes a liquefaction component covering the countries/territories of Hong Kong, Indonesia, Macau, the Philippines, Singapore, Taiwan, and Vietnam. See Section 4 for detailed discussions of the methodology used to estimate liquefaction intensity. For the methodology used to estimate liquefaction damage, see Sections 5.
- [Verisk Earthquake Model for Australia](#)  
See Section 4 for detailed discussions of the methodology used to estimate liquefaction intensity. For the methodology used to estimate liquefaction damage, see Sections 5.
- [Verisk Earthquake Model for New Zealand](#)  
See Section 4 for detailed discussions of the methodology used to estimate liquefaction intensity. For the methodology used to estimate liquefaction damage, see Sections 5.
- [Verisk Earthquake Model for the Chile](#)  
See Section 4 for detailed discussions of the methodology used to estimate liquefaction intensity. For the methodology used to estimate liquefaction damage, see Sections 5.
- [Verisk Earthquake Model for Colombia](#)  
See Section 4 for detailed discussions of the methodology used to estimate liquefaction intensity. For the methodology used to estimate liquefaction damage, see Sections 5.
- [Verisk Earthquake Model for Ecuador](#)  
See Section 4 for detailed discussions of the methodology used to estimate liquefaction intensity. For the methodology used to estimate liquefaction damage, see Sections 5.
- [Verisk Earthquake Model for Peru](#)  
See Section 4 for detailed discussions of the methodology used to estimate liquefaction intensity. For the methodology used to estimate liquefaction damage, see Sections 5.

- [Verisk Earthquake Model for Venezuela](#)

See Section 4 for detailed discussions of the methodology used to estimate liquefaction intensity. For the methodology used to estimate liquefaction damage, see Sections 5.

- [Verisk Earthquake Model for the Caribbean](#)

See Section 4 for detailed discussions of the methodology used to estimate liquefaction intensity. For the methodology used to estimate liquefaction damage, see Sections 5.

## Landslide

---

The main objective of regional earthquake-triggered landslide hazard analysis is to evaluate the location of the areas where landslides can be triggered by future earthquakes. The susceptibility of an area to earthquake-triggered landslides can be assessed based on potential ground motion, and geological and topographical conditions. The following Verisk earthquake models include explicit modeling for landslides:

- [Verisk Earthquake Model for the United States](#)

See Section 4 for detailed discussions of the methodology used to estimate landslide intensity. For the methodology used to estimate landslide damage, see Sections 5.

- [Verisk Earthquake Model for Canada](#)

See Section 4 for detailed discussions of the methodology used to estimate landslide intensity. For the methodology used to estimate landslide damage, see Sections 5.

- [Verisk Earthquake Model for New Zealand](#)

See Section 4 for detailed discussions of the methodology used to estimate landslide intensity. For the methodology used to estimate landslide damage, see Sections 5.

## Tsunami

---

Currently, the following Verisk models feature a separate tsunami module that uses dynamic simulation techniques to probabilistically estimate tsunami intensity and damage:

- [Verisk Earthquake Model for the United States](#)

See Section 4 for detailed discussions of the methodology used to estimate tsunami generation and intensity. For the methodology used to estimate tsunami damage, see Sections 5.

- [Verisk Earthquake Model for Japan](#)

See Section 4 for detailed discussions of the methodology used to estimate tsunami generation and intensity. For the methodology used to estimate tsunami damage, see Sections 5.

- [Verisk Earthquake Model for Canada](#)

See Section 4 for detailed discussions of the methodology used to estimate tsunami generation and intensity. For the methodology used to estimate tsunami damage, see Sections 5.

- [Verisk Earthquake Model for Southeast Asia](#)

The Verisk Earthquake Model for Southeast Asia models tsunami risk to the countries and territories of Indonesia, the Philippines, and Taiwan. See Section 4 for detailed discussions of the methodology used to estimate tsunami generation and intensity. For the methodology used to estimate tsunami damage, see Sections 5.

- [Verisk Earthquake Model for New Zealand](#)

See Section 4 for detailed discussions of the methodology used to estimate tsunami generation. For the methodology used to estimate tsunami damage, see Sections 5.

- [Verisk Earthquake Model for Colombia](#)

See Section 4 for detailed discussions of the methodology used to estimate tsunami generation. For the methodology used to estimate tsunami damage, see Sections 5.

- [Verisk Earthquake Model for Ecuador](#)

See Section 4 for detailed discussions of the methodology used to estimate tsunami generation. For the methodology used to estimate tsunami damage, see Sections 5.

- [Verisk Earthquake Model for Peru](#)

See Section 4 for detailed discussions of the methodology used to estimate tsunami generation. For the methodology used to estimate tsunami damage, see Sections 5.

- [Verisk Earthquake Model for the Caribbean](#)

See Section 4 for detailed discussions of the methodology used to estimate tsunami generation. For the methodology used to estimate tsunami damage, see Sections 5.

## Storm Surge

---

Currently, storm surge is explicitly modeled within the Verisk Hurricane Model for the United States and the Verisk Tropical Cyclone Model for Australia, while it is a free-standing model for Great Britain. Model documentation can be found at the following links:

- [Verisk Hurricane Model for the United States](#)

The storm surge module is a fully probabilistic component of the Verisk Hurricane Model for the United States. Descriptions of methodology used for storm surge generation are provided in Section 3, local intensity estimation in Section 4, and damage estimation in Section 5.

- [Verisk Typhoon Model for Japan](#)

Storm surge is modeled dynamically with inland extent and inundation depth, and incorporates tidal phase, amplitude and temporal variability. Descriptions of methodology used for storm surge generation are provided in Section 3, local intensity estimation in Section 4, and damage estimation in Section 5.

- [Verisk Typhoon Model for Southeast Asia](#)

The storm surge module is a fully probabilistic component of the Verisk Typhoon Model for Southeast Asia for the countries of the Philippines, Taiwan, and Hong Kong. Descriptions of methodology used for storm surge generation are provided in Section 3, local intensity estimation in Section 4, and damage estimation in Section 5.

- [Verisk Tropical Cyclone Model for Australia](#)

Storm surge is modeled dynamically with inland extent and inundation depth, and incorporates tidal phase, amplitude and temporal variability. Descriptions of the methodology are provided in Section 4, while damage estimation is provided in Section 5.

## Hurricane Induced Inland Precipitation

---

Currently, hurricane induced inland precipitation is explicitly modeled within the Verisk Hurricane Model for the United States. Model documentation can be found at the following link:

- [Verisk Hurricane Model for the United States](#)

Hurricane induced inland precipitation module is a component of the Verisk Hurricane Model for the United States. Descriptions of methodology used for inland precipitation generation are provided in Section 3, local intensity estimation in Section 4, and damage estimation in Section 5.

- [Hurricane Induced Precipitation](#)

Managing US Flood Risk- Modeling Hurricane Induced Precipitation

## Demand Surge

---

Documentation on the Verisk demand surge function and its validation is described in the document [AIR Demand Surge Function](#).

Note that the current default Verisk demand surge function was developed using economic principles and validated based on U.S. loss levels and component cost analyses, as described in this document. Because demand surge is a phenomenon seen only with especially large catastrophes, there are relatively few events with which to validate demand surge functions outside of the U.S. This scarcity of data is further complicated by the relative paucity of cost indices and detailed data. Nevertheless, development of country/region demand surge functions is currently underway at Verisk. These will depend on, among other things, the size of local and national labor markets and thus their ability to accommodate excess demand, and augmented by other labor, material, and construction indices as available. The functions will reflect the interaction between supply and demand of rebuilding resources and will be scalable to suit local economies.

In the meantime, for countries other than the U.S., clients may choose to apply the U.S. demand surge function or a user-defined demand surge function, at their discretion. Clients are also encouraged to perform sensitivity testing to better understand the scale of impact and uncertainty inherent in applying demand surge to non-U.S. models and perils.

## Other Resources to Aid Understanding of Verisk Models

Verisk is committed to ensuring that our clients derive maximum value from the models and software they license. To that end, Verisk offers a multi-tier approach to technical support that includes on- and off-site training and telephone support. Verisk also offers the [Verisk Institute Catastrophe Modeling Certification Program](#)—an intensive course designed to meet the industry's growing need for skilled catastrophe risk modelers and managers.

Verisk also sponsors various Client Conferences which are great opportunities for our clients to learn about models for different perils, latest model updates and best practices of using Verisk software. Throughout the year, Verisk sponsors webinars to introduce new models, explain model updates, and discuss other relevant topics, all of which will benefit the users.

Extensive software documentation is available, including Touchstone, Touchstone Re User Guides, and guides for input data preparation. In addition, Verisk has recently introduced a new genre of documentation for regions with complex policy conditions or cat pools. These "Using the Model" guides explain in detail how to use the Verisk models in Touchstone, Touchstone Re, including any special instructions on importing data and running an analysis. Some of the guides currently available are in the United States are:

- [Using the Verisk Hurricane Model for the United States in Touchstone](#)





- [Using the Verisk Inland Flood Model for the United-States in Touchstone](#)
- [Using the Verisk Severe Thunderstorm Model for the United States](#)
- [Using Builder's Risk in Touchstone](#)
- [Using Geocoding in Touchstone](#)
- [Modeling Industrial Facilities](#)

More information on Verisk's approach to training and technical support, support contact information and additional "Using the Verisk model" documents are available for other perils, software applications and countries on the [Client Portal](#).

Information about the Verisk Institute Catastrophe Modeling Certification Program can be found at the [Verisk Institute](#) page.

### 3 Model Uncertainty and Model Limitations

Actuaries using complex models, such as catastrophe models, should determine the appropriateness of the model for the intended application. ASOP 38, Section 3.4, indicates that the actuary “*should evaluate whether the catastrophe model is appropriate for the intended purpose.*”

Catastrophe models have become increasingly sophisticated since they were first introduced in the late 1980s. The models operate at ever higher resolutions (made possible by almost exponential increases in computing power); the scientific understanding of the physical phenomena of natural hazards continues to evolve and become more refined; and the availability of data used for both model development and model validation continues to increase. Nevertheless, translating model results into informed decision making requires a balanced understanding of uncertainty in model assumptions and parameters, and a judicious awareness of the limitations of modeling.

Several of these limitations are briefly discussed in the following sections.

#### Model Uncertainty

Catastrophe models are developed based on assumptions about complex physical phenomena of which there is imperfect understanding, and the observed data for model calibration are limited, particularly in regions of very low frequency of catastrophic events. There are multiple sources of uncertainty in catastrophe models, and these can typically be grouped into two main classes; aleatory and epistemic.<sup>2</sup>

Aleatory uncertainty represents the inherent uncertainty due to the random nature of a physical or financial process. It should be expected that even as our knowledge of the process increases over time, aleatory uncertainty will never decrease, but we may acquire better tools for its measurement. The second source of uncertainty is epistemic, which results from lack of knowledge. This is commonly manifested by uncertainty in the choice of the form of the model, known as model uncertainty, and in the estimation of parameters, known as parametric uncertainty.

Model uncertainty can be illustrated by the choice of whether the recurrence of earthquakes on faults is treated as time dependent or time independent, or by whether the current climate is considered to be stationary. Parametric uncertainty relates often to scarcity of data in the estimation of model parameters, particularly in non-active regions.

For additional information, please refer to the published documents, [Perspectives: Advancing the Science of Risk Analysis](#), [Modeling Fundamentals: Understanding Uncertainty](#), [Modeling Fundamentals: Uncertainty Options in Software](#), [Uncertainty in Estimating Commercial Losses – and Best Practices for Reducing It](#), [Touchstone Financial Module](#), and [AIR Solvency II Guidance on Compliance: Model Assumptions and Limitations](#). This last document consolidates general assumptions that apply across all Verisk models and on specific key assumptions incorporated in the following Verisk models:

- Verisk Hurricane Model for the United States
- Verisk Earthquake Model for the United States
- Verisk Inland Flood Model for the United States
- Verisk Severe Thunderstorm Model for the United States

---

<sup>2</sup> See the *Verisk Current* [Understanding Uncertainty](#) for a discussion of key concepts in understanding uncertainty in catastrophe loss estimation, including its various sources.

- Verisk Winter Storm Model for the United States
- Verisk Extratropical Cyclone Model for Europe
- Verisk Earthquake Model for the Pan-European Region
- Verisk Inland Flood Model for Great Britain
- Verisk Coastal Flood Model for Great Britain
- Verisk Inland Flood Model for Central Europe
- Verisk Earthquake Model for Japan
- Verisk Typhoon Model for Japan
- Verisk Earthquake Model for Canada
- Verisk Tropical Cyclone Model for the Caribbean
- Verisk Tropical Cyclone Model for Hawaii
- Verisk Earthquake Models for South America

## Modeled and Non-Modeled Perils

Misunderstandings can occur when there is a lack of clarity about what the loss estimates produced by catastrophe models include or do not include. In some cases, associated perils that are not explicitly modeled may be captured—at least in some degree—implicitly, to the extent that modeled losses have been validated against actual claims data that may include these sources of loss. It should be noted, however, that even for some explicitly modeled perils, such as fire-following earthquake losses, the relative scarcity of detailed claims data necessarily leads to greater uncertainty in the loss estimates. These issues are discussed in greater detail the [AIR Solvency II Reference Guide](#).

Verisk also contributed to the good practice guide published by the Association of British Insurers, [Non-Modelled Risks—A guide to more complete catastrophe risk assessment for \(re\)insurers](#). A key part of Verisk’s contribution to the paper included techniques that can be used in risk quantification, for example the geospatial capabilities available in Verisk’s open platform Touchstone. These techniques are of particular interest for the assessment and management of non-modeled aspects of global catastrophe risks.

In most of Verisk’s new model documentation, clients can find out what perils and sub-perils are explicitly modeled and what related perils and sub-perils are not modeled in Section 1, “Facts at a Glance” of the full model documentation, under “Modeled Perils.” For example, the Verisk Earthquake Model for Japan includes losses arising from ground shaking, liquefaction, fire following, and tsunamis. Landslides associated with earthquakes are not explicitly modeled in the Verisk Earthquake Model for Japan; however, as modeled losses have been calibrated to and validated against actual reported losses, the impact of landslides on modeled losses is captured implicitly. The 2014 release of the Verisk Earthquake Model for Canada features explicit modeling of earthquake-induced landslides. It is advisable for actuaries and risk managers to create a list of non-modeled perils that are material to your business. A truly exhaustive list may be impractical as some non-modeled sources will be very local in their nature and difficult to identify.

## Other Non-Modeled Sources of Loss

In addition to secondary perils associated with the primary modeled peril, there may be other non-modeled sources of loss. Verisk modeled losses, for example, do not explicitly include losses arising from the following sources:

- Loss Adjustment Expense
- Hazardous Waste Cleanup
- CAT Pool Assessments

In this context, clients should be aware that the demand surge function reflects economic inflation only. It does not account for other factors that may increase insured losses in the aftermath of a catastrophe, such as those above or insurance-to-value issues. These factors may cause higher losses than expected, but do not constitute demand surge. In addition, it is not correct to use a single factor to adjust for insurance-to-value or hazardous waste clean-up, as the correct adjustment for these issues is heavily dependent on the type of business a company writes. If further adjustments to loss estimates are required due to such issues, clients have the option to manually modify the demand surge function, as well as the application of other loss adjustment factors. To resolve insurance-to-value issues, clients also have the option of using various Verisk tools such as Xactware to obtain more accurate replacement values for insured residential and commercial properties.

## Limitations with Respect to Lines of Business, Occupancy Classes and Coverage

All Verisk's model documentation includes detailed information about supported lines of business, coverage, construction types and occupancy classes. Information about supported lines of business can be found in the "Facts at a Glance" in Section 1 of the model documentation. For information about modeled coverage, construction types, and occupancy classes, clients are referred to the sections in the full model documentation devoted to the model's implementation in Touchstone Re and Touchstone. In most cases, these are Sections 7 and 8 of the model documents. (Note that Verisk's capabilities for estimating losses to workers' compensation, personal accident and life policies are not offered by way of separate models; rather these are supported lines of business in some earthquake models and in the U.S. terrorism model.)

Modeled loss estimates for some occupancy classes and lines of business are characterized by more uncertainty than others—uncertainty that is primarily a function of the relative scarcity of available detailed damage and loss data for the development and validation of damage functions. Railways, dams, and life-lines, for example, fall into this category.

Verisk U.S. Hurricane and Earthquake models include sophisticated capabilities for estimating losses to highly complex industrial facilities in the U.S. for the earthquake and hurricane perils (see Section 6 in the model documentation for those perils). These models feature more than 400 unique damage functions for industrial components ranging from pipe racks, to flares, to tanks—distinguishing between anchored and unanchored components, and full or partially full tanks, for example. While these damage functions have been developed using site-specific risk assessments, advanced engineering studies, materials tests, and post-disaster field survey data, there remains a higher level of uncertainty in the loss estimates for these occupancies relative to residential and small commercial properties for which claims data is relatively abundant. (For more information on modeling industrial facilities, see the *AIR Current* [A More Rigorous Approach to Assessing Catastrophe Risk for Industrial Facilities](#) or the [Modeling Industrial Facilities](#) software documentation.)

Similarly, Verisk has introduced capabilities in the earthquake and typhoon models for Japan for the estimation of losses to a variety of specialized risks such as railway systems, marine cargo, marine hull (including marine hull under construction), aviation, transit warehouses, and personal accident. Many of Verisk's models, including the earthquake and hurricane models for the United States, the earthquake model for China, and all of the typhoon models for the Northwest Pacific Basin (Japan, China, South Korea, and Southeast Asia) support loss estimation for buildings currently under construction. Actual observations of damage from past catastrophes as well as published research are used to develop damage functions for these exposures and, where appropriate, their contents. However, due to the complexity of the underlying risks, a scarcity of detailed claims data and, equally important, an inadequate degree of detail in the underlying exposure data available as input to the model, there is higher degree of uncertainty surrounding the loss estimates for these risks.

Detailed business interruption (BI) policy conditions and property characteristics are often not available to the user for input into a catastrophe model. For example, information on whether a policy includes coverage for dependent building(s) damage, their locations, and the degree of dependency between locations is generally not available. In addition, detailed BI and contingent BI (CBI) claims data is relatively scarce. Verisk's methodology for modeling BI and CBI coverage employs network models that construct a simulation of the interconnections between the principal business, supply chains and lifelines, as well as logical assumptions about occupancy and the characteristics of "typical" BI policies to model total BI losses for any given occupancy and the variation in BI losses across different occupancies (see Section 5 of the relevant model's documentation). Nevertheless, companies should recognize the additional uncertainty with respect to modeled loss estimates for the BI and CBI coverage.

## 4 Data Input

Evaluating the quality and availability of user input data to be used in catastrophe models is an important requirement for ASOP compliance. ASOP 38, Section 3.3.2, explains, *“The actuary should take reasonable steps to confirm that the precision and accuracy of the user input are consistent with the intended purpose and should refer, as applicable, to ASOP No. 23, Data Quality, when selecting, using, or evaluating data used in the catastrophe model.”*

ASOP 38 refers actuaries to ASOP 23, *Data Quality*, for further guidance on quality and availability of the model user input data. High quality data are the key to any actuarial analysis. The standard requires actuaries to check data for consistency and reasonableness as well as accuracy and comprehensiveness. As stated in ASOP 23, Section 3.3(b), the actuary should *“make a reasonable effort to identify data values that are questionable or relationships that are significantly inconsistent. If the actuary believes questionable or inconsistent data values could have a significant effect on the analysis, the actuary should consider taking further steps, when practical, to improve the quality of the data.”*

### Exposure Data Elements

Exposure data quality remains a key issue in catastrophe risk management. Accurate model output is highly dependent on the correct coding of risks. For example, significant underestimation of catastrophe losses can occur when limits are input in lieu of the replacement values, or when necessary coding for coverage of storm surge damage is missing. Verisk models will assume that the correct replacement value of a structure is known and that the proper policy terms are used as input.

Verisk’s industry-level loss estimates rely on accurate replacement values, risk counts, and take-up rates, about which there is considerable uncertainty in many regions of the world. Depending on when the industry exposure database (Industry Exposure Database) was last updated for each country, companies who use Verisk industry loss estimates for decision making may wish to adjust those losses to reflect economic growth, construction booms, and changes in the insurance landscape.

Exposure data contains all the information which describes the physical and financial characteristics of the property under consideration.

There are three primary types of exposure data:

- **Location information** includes latitude, longitude, street address, ZIP Code, city, county, and state.
- **Replacement Value** is the cost to replace a risk should it be damaged or destroyed. This includes damage to a building (Coverage A and Coverage B) and its contents (Coverage C) as well as any cost due to loss of use (Coverage D). Note true replacement value is different from the coverage limits of a policy.
- **Primary Risk Characteristics** of a building include the construction type and occupancy class of a building. It also includes other risk characteristics such as year built, number of stories, and special building modifiers to help protect against perils such as earthquake, hurricane, and severe thunderstorm damage. Vulnerability functions have been developed by Verisk to account for many building characteristics in the calculation of damage.

Exposure data elements available for all modeled perils can be found in the associated model documentation. In the models, damage is calculated based on physical characteristics of structure. Construction and occupancy classifications form the basis of the damage functions in the model. When primary risk characteristic information is not available, you should make reasonable assumptions based on your understanding of the exposure data.

Damage functions are also developed to account for additional secondary risk characteristics. The Verisk Individual Risk Module is used to modify damage functions of basic structural characteristics to account for the

contribution of secondary risk characteristics on overall building performance. Secondary risk characteristics include features such as roof covering, roof shape, the presence or absence of storm shutters, foundation, and soft stories. Information about available secondary risk characteristics for modeled perils can be found in the associated model documentation.

## Importing Exposure Data into Verisk Software

Touchstone supports import of real and personal property exposure data as well as workers' compensation data. Use the import tool in Touchstone to import contract and exposure data from external sources into Verisk Touchstone CEDE databases, regardless of the format of the source. To learn more about mapping exposure data columns for import into Touchstone please refer to the [Touchstone Online Help](#) on the [Client Portal](#).

Touchstone import supports the following data formats:

- Almost any custom, client-specific data format saved as a text file
- Verisk's open-source data formats, UNICEDE®/ (PX/FX)
- RMS's EDM exposure databases
- Standardized industry exposure data formats (ACORD Binding Authority); Touchstone does not support ACORD reports of Workers' Compensation fields

CEDE databases are the optimal format for importing exposure data into Touchstone for loss analysis. Verisk has openly published this non-proprietary schema design to ease the process of transferring catastrophe exposure data between users and companies, ensuring that everyone who needs access to your data will be able to easily understand it. To learn more about the Touchstone database schema, please go to the [Developer Zone](#) on the [Client Portal](#).

[Touchstone Online Help](#) contains itemized and detailed explanation of all the potential components of a UPX file, to help you prepare, revise, or read these files.

Other ways of importing the data include Location Spreadsheet Import and manual entry directly within the User Interface U/I.

## Understanding Data Uncertainties and Performing Data Quality Checks

Data uncertainties stem from missing, unknown, and imperfect exposure data. Some common areas of uncertainties include geographic location, valuation of the risk and the vulnerability of the replacement value, and the categorization of the risks with regard to vulnerability.

Model results are sensitive to the accuracy of geographic data. Catastrophe models compute the intensity of hazard at a given location (e.g. wind speed or ground motion intensity) depending on the latitude/longitude of the exposure. The modeled loss is more accurate when more detailed location-specific address information is provided. Users should always aim to have the highest resolution geographic data to ensure the most accurate results. When you import and geocode your exposure data in Touchstone, the import log will show the number of records that were imported and geocoded correctly. Users are encouraged to use online resources to complement their exposure data gaps or correct any mistakes that may exist in the address information. Furthermore, modeled loss estimates for any single location is very sensitive to geocoding precision, the degree to which varies by peril. However, if your book is well-distributed across zip codes, the resulting loss estimate may not be greatly affected by postal code centroid geocode precision for the whole portfolio.

The replacement value is an estimate of the cost to repair or replace a building damaged or destroyed. The estimate can be derived in a variety of ways, ranging from a professional building inspection to replacement cost

estimators. Replacement values are important because estimated ground-up losses are calculated directly from the replacement value. There are a lot of uncertainties around the replacement value, for example if books of business do not keep pace with construction cost changes or limits are reported in place of replacement values. Users of the model are encouraged to perform data audits and do reasonability checks to eliminate those areas of uncertainties.

In the context of inputs to catastrophe models, a risk's vulnerability to damage is captured primarily in the input fields which characterize a risk's physical features. In the models, damage is calculated based on the physical characteristics of the structure. Construction and occupancy classifications form the basis of the damage functions in the model. Damage functions are also developed to account for additional characteristics, including year built, height, and secondary risk characteristics. Users are encouraged to perform sensitivity test on these characteristics to get a good sense of the loss estimate sensitivity based on these characteristics.

Due to the uncertainties discussed above, we encourage users of our model to do reasonability checks before any data import.

Prior to running a loss analysis, model users should always create (and review) overview summaries for the exposures being analyzed. This enhances model users' understanding of the exposure data structure, as well as any weaknesses in the exposure data, such as having many unknown characteristics. Examples of possible exposure data overview summaries include:

- Compare the total replacement value (by coverage) and the number of risks against what is expected in the exposure data.
- Create an overview of the exposure's key characteristics such as proportion of replacement value by construction, occupancy, number of stories and year built
- Perform a summary of policy conditions such as total number of layers, reinsurance contracts, and total sum of limits and deductibles to ensure that what is being analyzed is as originally intended.
- Compare the split of replacement value by geocode match (e.g. exact address or postcode centroid).

## Dealing with Gaps in Data and Augmenting Data Quality

Touchstone's Data Quality diagnostic tools enable users to determine the strengths and weaknesses of the exposure data that has been imported for portfolio-level catastrophe loss analysis. If any data elements are missing or weak, the Data Quality tools are available to assist in supplementing the exposure data. To learn more about improving the quality of exposure data using Touchstone's Data Quality diagnostic tools, refer to the Touchstone Online Help on the Client Portal.



## 5 Model Output

The model provides a range of outputs that can be utilized in different areas. The user should examine the model output for reasonableness and also relative to its intended use. The information provided in this document is quite general. However, with the release of Next Generation Models (NGM) in the summer of 2022, there will be some changes to the database schema. A preview of the documentation changes can be found at [NGM Documentation Preview](#).

### List of Common Model Output


#### The Full Probability Distribution of Losses (EP Curve)

The EP curve is a ranking of event losses and is used to quantify a complete risk profile. In general:

$$\text{Exceedance probability of the } n\text{th highest loss} = n / [\text{years in simulation}]$$

Loss Exceedance probabilities are provided on both an annual aggregate and annual occurrence basis. An annual aggregate loss is the sum of the losses caused by all simulated events in a given single year. The probability distribution of annual aggregate losses displays the probability of experiencing aggregate losses of specified amounts resulting from all events in a given single year. These distributions provide the most comprehensive view of risk, and can be used in pricing, underwriting, portfolio management, and aggregate risk transfer decisions. An annual occurrence loss is the largest loss caused by a single simulated event in a given year. The probability distribution of annual occurrence losses displays the probability of experiencing losses of specified amounts resulting from a single event in a given single year. These distributions can be used in making decisions regarding individual occurrence limits and retentions for catastrophe reinsurance.

One important clarification to make is the concept of return period. For example, if the exceedance probability of hurricane Katrina size of loss is 5%, this translates into a return period of one in twenty years (1/5%). The return period should be interpreted as the probability of a loss at least as large as that resulting from a hurricane the size of Katrina happening *in any given year* is 5%.

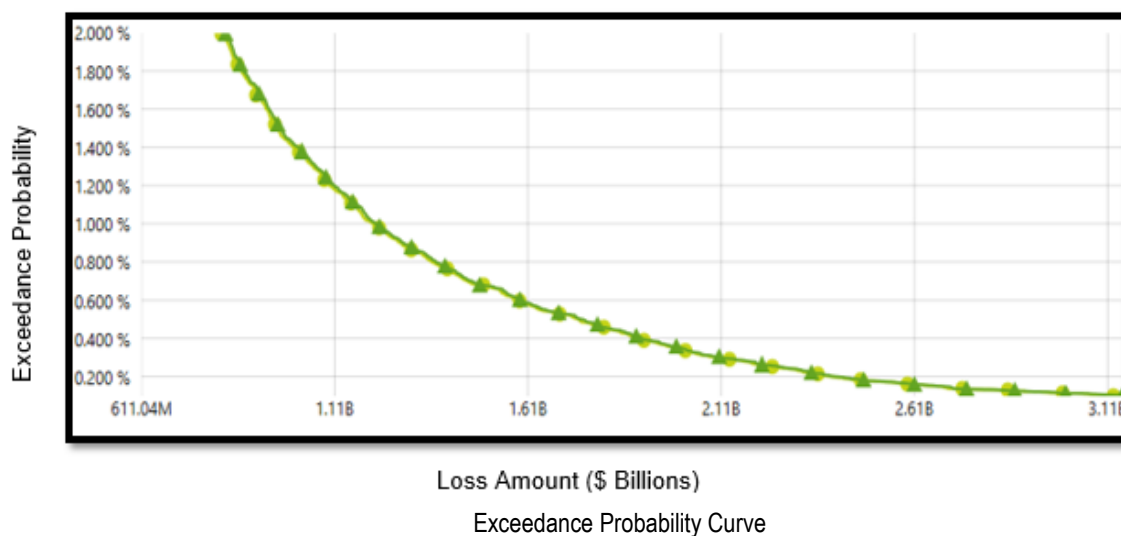

## Event Loss Summary Detail Table

The Event Loss Summary Detail Table in the Touchstone user interface (or export) displays more detailed information about each of the events generated by the standard (probabilistic) loss analysis. This information allows users to assess the impact of large loss scenarios on a portfolio level and to dig into what type of event can cause that size of losses to a portfolio. By default, the table displays stochastic events; however, you can also view historical and world scenario event losses by selecting them in the Events Detail section of the ribbon.

The table below contains Event Loss Summary Table detailed information:

Table 3. Touchstone Event Loss Summary Table Detailed Information

| Item                      | Description   |
|---------------------------|---|
| Year                      | The year for the event based on the 10,000-year simulation. It is a simulation year only and does not represent an actual date. |
| Event ID                  | The event identification number for the simulated event   |
| Peril                     | The peril type for the simulated event  |
| Ground Up Mean Loss       | The ground-up loss generated by the simulated event   |
| Retained Mean Loss        | The retained loss generated by the simulated event  |
| Pre-Layer Gross Mean Loss | The pre-layer gross loss generated by the simulated event   |
| Gross Mean Loss           | The gross loss generated by the simulated event   |
| Net of Pre-Cat Mean Loss  | The net of pre-Cat loss generated by the simulated event  |
| Post-Cat Net Mean Loss    | The post-Cat Net loss generated by the simulated event  |
| Event information         | The intensity, magnitude, or other information about the event, along with the associated industry loss                         |

## Average Annual Loss

Average annual losses (AAL) by line of business, by coverage, by geographical area or by user defined category. "Average loss" is the long-term average loss, on either an aggregate or occurrence basis. It is calculated by using either the aggregate total losses or maximum occurrence losses for all the simulated years and then dividing by the number of years in the simulation. This information is usually used for ratemaking purposes. Users can use this to determine a catastrophe load by defined category or for studies to determine the best areas for expansion or retraction from a catastrophic point of view.

## Event Footprints

For each individual event, our software provides detailed graphical and other key information about the event. For a hurricane event, this includes track information, landfall, and magnitude, radius of maximum winds, central pressure, and maximum wind speed. For an earthquake event, this includes magnitude, location, type of the fault, depth, and source area. The figure below shows an example of a hurricane track map for Hurricane Katrina. By examining this map, we can compare the tracks of events of certain losses against the exposure data.




One Sample Hurricane Event Map

## Estimates of Uncertainty

The EP Curve with Secondary Uncertainty analysis feature in Touchstone allows users to display additional uncertainty. However, the user should be aware that the financial module always accounts for secondary uncertainty in loss calculations. The difference is that the EP Curve with secondary uncertainty is constructed using the secondary uncertainty around each event, whereas the Standard EP Curve uses the mean of each event distribution.

The uncertainties estimated by different model components are referred to as Primary (parameter/process) and Secondary (parameter) uncertainty (see figure below). Primary uncertainty refers to uncertainty in the modeling and estimation of the natural peril physical parameters that are included in an event catalog. Secondary uncertainty is the uncertainty in structural damage estimation, which is also referred to as the uncertainty in losses given an event has occurred.

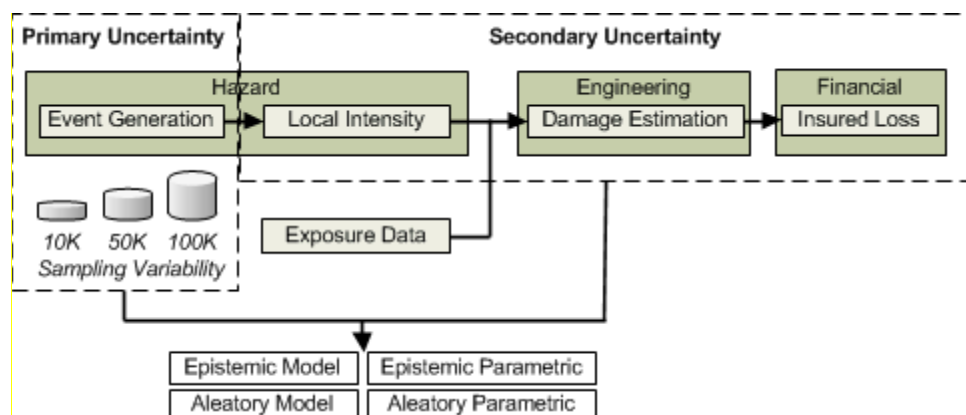

Primary and Secondary Uncertainty in the Model Architecture

To understand more about technical aspects related to Touchstone's financial module, including modeling uncertainty, please refer to the documents [Touchstone Financial Module](#), [Introduction to NGM](#) and [NGM preview](#).

Figure 3.

## Independent Tests on Data Output

As noted above, users should understand the uncertainty in model assumptions and parameters and be cognizant of the limitations of modeling. This section lists a few tests users of the model can do to understand the impact of assumptions inherent in an analysis as well as the uncertainties with the model results.

## Testing Sensitivity to Alternative Catalogs

Verisk has provided alternative catalogs that clients utilize to test the sensitivity to their loss result.

For the hurricane peril, for example, companies can choose to run Verisk's standard or warm sea-surface temperature (WSST) conditioned catalog. While both represent views of long-term risk, the WSST catalog is developed based on only those years since 1900 in which sea-surface temperatures were warmer than average. Not surprisingly—since hurricanes are fueled by warm ocean waters—the WSST catalog incorporates higher rates of tropical cyclone activity. However, the relative impact of these two catalogs varies by region.

In the case of earthquake risk, clients can choose to run their exposure through the time-independent or the time-dependent catalog. In time-dependent models of earthquake occurrence, the probability that an earthquake will occur on a particular fault increases with the length of time elapsed since the previous event on that fault, while in time-independent models the probability of an earthquake is independent of when the last event occurred.

## Validation of Company Claim Information Using Historical Events Set

Verisk performs a rigorous validation process for modeled industry losses using available claim information resources provided by ISO's Property Claims Services for historical U.S. events. Verisk encourages all levels of model validation by clients and is readily available to guide the process. Clients can utilize the historical catalog provided in the software to test their book/locations and validate their own loss experience claim data. If historical claims data are used, this data must be trended or adjusted to current level accounting for both exposure growth and inflation.


Note, however, that there are several factors that impact the actual losses in an event, some of which are accounted for in the model and some of which cannot be accounted for given the nature of the input data and the limitations of any model. Additionally, there are limitations to the conclusions that can be drawn about the differences between actual and modeled losses due to the limited amount of exposure and loss data being

contemplated. As a result, it is expected that losses output by a catastrophe model will differ, in many cases significantly, from actual losses for a client's book. However, if the output is consistently higher or lower than the model output, clients are encouraged to research causes of the difference.

## Reasonability Test Using Industry Exposure

Industry exposures are incorporated in Touchstone Re. Clients can input their exposure data into these applications as sums insured, and this information will be utilized to calculate the company's share of estimated industry losses. A comparison can be made against the users detailed loss estimates from Touchstone for reasonability/benchmark checking. (See the example results graphs below). However, some differences to note are:

- Differences in underlying exposure databases (Company versus market share)
- Deductibles and limits (Market share average versus policy specific)
- Embedded sub-perils (i.e. – storm surge, tsunami, etc.)

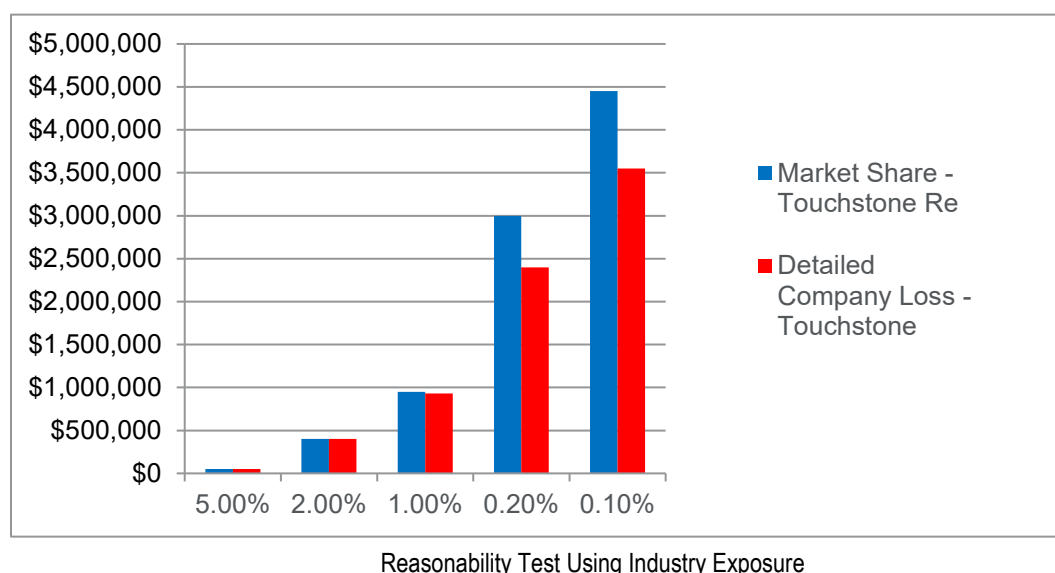

From the above comparison, we can tell the company's data aligns with industry results very well. There are some differences in the tail. Further comparison down to the county level (see Figure below) shows a large difference between the market share results and the detailed company loss result produced by Touchstone for Barnstable County. For this county, the modeled company losses are much lower than the market share losses, indicating the company may have been conservative in their business underwriting than the industry. If this analysis result is in line with the company underwriting strategy, then the user can be more confident in the detailed loss analysis results.

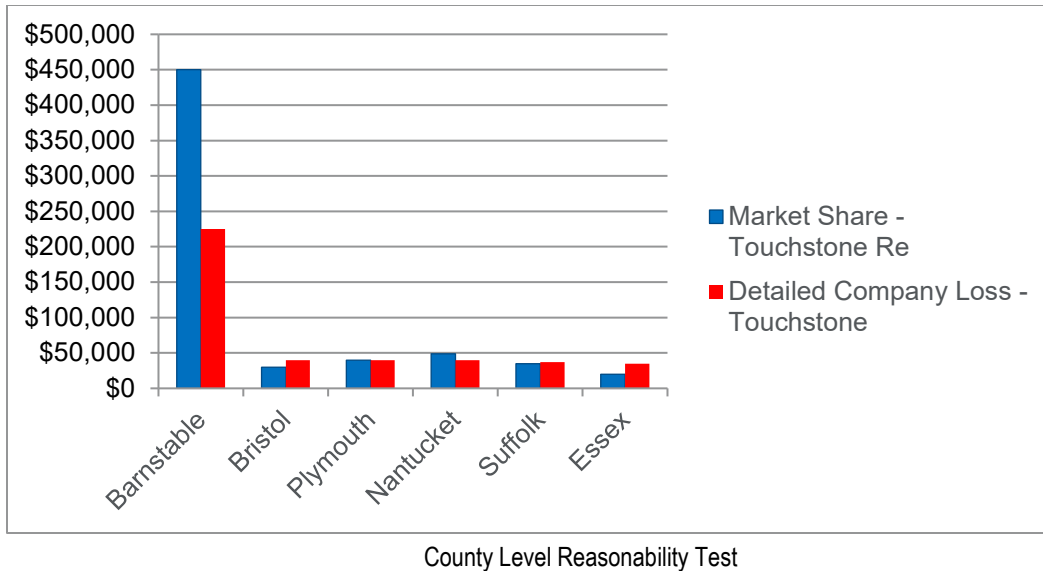


Figure 5.

## Common Sensitivity Tests

Companies should always strive to understand the sensitivity of modeled loss results to changes in key assumptions. Verisk encourages companies to perform their own sensitivity testing both within and external to the software.

A list of common sensitivity tests utilizing Touchstone software are:

- **Exposure Coding Test:** (construction code or occupancy code and year built). This test can help the users examine if there is any error in coding or, if the default coding is not correct, what the loss result influence would be. Construction and occupancy codes are two key elements of the exposure; they feed into the damage function calculation and if any of this information is missing, you can set a default value or have the software augment the exposure (using Touchstone Data Quality Diagnostics) by the same distribution as the rest of the book.
- **Storm Surge for Hurricane Peril:** The recommended default storm surge factor for a residential book in Touchstone is 5%. The increase in losses due to storm surge for specific book and exposure may seem linear; however, Verisk's storm surge footprint is independent of the wind field and considers all the physical parameters of surge. Note that certain applications such as Florida Ratemaking preclude the inclusion of any provision for storm surge.
- **Demand Surge:** Demand surge is a check box on the analysis options screen. Users can use the provided default demand surge curve or change it to incorporate different views from the management team to test on specific exposures. Customized demand surge functions can be added via Touchstone's administrative console.
- **Correlation:** There are two options for correlation testing on your specific book. Inter-policy correlation and intra-policy correlation. The inter-policy correlation refers to the correlation that exists between policies—this would be used when dealing with several single location policies. The intra-policy correlation refers to the correlation between individual locations within a policy. With the release of our NGM updates mid-2022, correlation will be automatically incorporated into loss estimates.

## Additional Tests

---

- **Secondary Risk Characteristics:** Primary building characteristics include attributes such as occupancy, construction, height, and year built, while secondary building characteristics include more detailed features, such as roof-covering, glazing type, and roof to wall connection. Exploring the impact of secondary risk characteristics—and their complex interaction—is a particularly worthy exercise given the increasing number of states adopting mitigation credits. Indeed, users may want to run cost-benefit analyses to determine the benefit of collecting additional data on mitigation features
- **Policy conditions test:** Determining the sensitivity of varying policy conditions is an important underwriting tool. Companies may quickly vary the attachment and exhaustion points, participation and even region of application within Touchstone Re as they explore risk transfer options.
- **Convergence tests:** Verisk catalogs include 10K, 50K and 100K (and for some perils 500K) years of events. Touchstone uses advanced computing power to generate tens of thousands of simulated years of loss experience for any property data set presented to the models, essentially eliminating pure randomness caused by insufficient sample sizes. When users have the option of choosing among multiple catalogs, their choice depends on the purpose of the project as well as the peril under study. Smaller portfolios or regions may require larger catalogs for sufficient convergence. If time and availability permit, we recommend the largest catalog possible. For rate filing purposes for the U.S. hurricane peril, the 50K year catalog or higher is recommended.
- **Logical Relationship to Risk:** Anyone using the results from a catastrophe model are encouraged to confirm the model loss costs exhibit logical relationships among variables such deductible, construction type, policy form, coverage, territory, and regions.



# 6 Appropriate Use of Model Output

## Common Uses of Model Output

Catastrophe models provide a wide range of outputs which have been presented in the previous section. These model outputs can be integrated into different areas of the insurance business including Enterprise Risk Management (ERM), Reinsurance Structuring, Portfolio Optimization, Actuarial/Pricing, Underwriting, and Claims Management. Catastrophe modeling can be imbedded in the regular workflow of the whole insurance business:

- Enterprise Risk Management

The EP curve is a core input into management's enterprise risk. In looking at the EP curve for their portfolio, a CRO or CFO can determine the probability of catastrophic losses that could trigger a rating downgrade to a company. At the same time, rating agencies now require that insurance companies employ comprehensive and integrated catastrophe risk management practices to earn secure ratings. Rating agencies want not only a more robust stress analysis based on modern risk metrics like Tail Value at Risk, but a sense that catastrophe models are embedded into the workflow for underwriting, rating, and financial management decision in the company. Companies can utilize the model output to communicate with different rating agencies or plug the model output in their capital requirement formulas.

- Risk Transfer Decisions

Users can decide coverage for the extreme events based on the occurrence EP curve and use the aggregate EP curve for aggregate coverage or reinstatement or drop-down provisions. It is important to note that the model output for which your reinsurance decision is based on must include all the risk exposure to your book of business. If you are buying reinsurance to cover certain region or peril, you should be looking at the model output based on that regional or peril. However, if you are considering a countrywide reinsurance program or a global reinsurance program, the exposure and perils should be corresponsive.

- Portfolio Optimization

The output from catastrophe models can be leveraged for complex decision-making frameworks through the usage of optimization techniques. The optimization processes developed at Verisk allow shaping a portfolio in such a way that several performance objectives can be optimized simultaneously while keeping track of multiple constraints. These types of processes give portfolio managers the ability to consider multiple decision criteria in a single framework that considers risk modeling results and other corporate objectives. Advanced analytics techniques are employed to sift through millions of possible alternatives to achieve best performing solutions. As an example, situations in which these techniques have been used include the management of residual risk pools, the design of growth strategies, and de-risking of a portfolio to reduce reinsurance costs while maximizing premiums. Verisk has a dedicated group for consulting service in this area.

- Pricing/Ratemaking

Model output AAL (average annual losses) and Standard Deviation are used in actuarial pricing formulas and rate-filings. Adjustments to include non-modeled loss are needed to account for the absolute risk to your portfolio. The output can be adjusted to serve an insurer's cat load directly in the pricing formula. Additionally, rating factors such as construction type, occupancy type, territory, deductible, etc. are all part of the exposure as input.

- Underwriting

Underwriters can use catastrophe model software at the point of sale in automated underwriting rules engines to make "go" or "no go" underwriting decisions. For example, they can check the exposure map



to see if the exposure concentrations for the current and potential book. Our software also shows the relative riskiness of new potential writings. Location level EP curves can help the underwriters to price the policy as well as to derive coverage terms. Using catastrophic modeling in the underwriting process can help companies to manage their catastrophic risk at the “front end” before the policies get on their book.

- Claim Management

We also provide many event scenarios based on most updated event parameters as well the potential future development for these parameters. Similar events to historic events in our catalogs are also identified. Clients can use this information to run against their exposures portfolio to get the earliest estimate for the potential losses to their company. Before each hurricane season, we encourage our clients to run their portfolio against the stochastic catalogs for advanced planning. Additional information on the catalogs is available through the [Catalog Viewer](#).

Verisk provides ALERT posting on any imminent catastrophic event around the globe. ALERT stands for AIR Loss Estimate in Real Time. We provide online updated event information as well as industry loss estimate for big events. During a hurricane event, our clients can download various tools provided through the Verisk ALERT service to get the earliest estimate for claim staff deployment, cash flow management, “live” cat protection purchase or communication to interested parties. Even after the event, our clients can still use our software to manage cash flow and decide whether to suspend or continue writing business in certain area. Please refer to the [ALERT website](#) for up-to-date event information.

## Best Practices for Decision Making Using Model Output

Actuaries utilize output from catastrophe models to make many important decisions about risk management, reinsurance purchase, and pricing. The model output can be used in various ways to support these decisions, and the following are several examples of best practices.

- Tail Value at Risk (TVaR)

TVaR is a quantification of the shape of your EP distribution beyond a certain threshold. It is an average of all simulated losses beyond a specified threshold. This is also a direct output from Touchstone. TVaR can be used to compare the relative risk between two exposure portfolios. In general, a portfolio with a bigger TVaR value is riskier. Further, the TVaR value can be used as a basis for portfolio optimization. Mitigating the TVaR value by eliminating certain contracts or policies that contribute disproportionately to your total TVaR value can help to lower your TVaR as well as the AAL for the entire portfolio.

- Consider Annual Aggregate EP Curves

The occurrence EP curve provides loss distribution for the largest potential loss in any given year while the aggregate EP curve provides loss distribution for the combined potential loss in any given year. Before the 2004-2005 hurricane seasons, many companies were adequately prepared for any one event occurrence, but they were not adequately prepared for a season with multiple U.S. hurricane landfalls. To prepare for the combination of multiple events in a season, the annual aggregate EP curve should be used.

- Understand Loss Driving Events

Users of the model should investigate event details to find out what kind of events are driving the losses for the company portfolio. The reinsurance coverage scheme should be different for one company whose losses are driven by a few large hurricane events versus another company whose losses are driven by a large amount of smaller severe thunderstorm events. Additional analyses to understand model output and extreme events beyond the cut off points are strongly encouraged.

- Multi-year Horizon Analysis

Enterprise risk managers are usually focusing on a longer-term period rather than just one year. A multi-year horizon analysis is helpful in this case. Users of the model can either combine the model results by randomly picking loss events from a one-year perspective analysis to create a multi-year risk analysis.

A review of the research paper [Notes on Using Property Catastrophe Model Results](#) , published in the Casualty Actuarial Society 2017 Spring Forum, may provide additional insight into sophisticated methods of analyzing model output.

## 7 Documentation

The documentation and disclosure requirements for actuaries using catastrophe models are outlined in section 4 of ASOP 38. Section 4.1 Required Disclosures in an Actuarial Report states *“When issuing an actuarial report to which this standard applies, the actuary should refer to ASOP Nos. 23, 41, and 56. In addition, the actuary should disclose the following in such actuarial reports, as appropriate:*

- a. the catastrophe model used and the intended purpose*
- b. the methodology used to validate the catastrophe model developed by experts*
- c. the extent of reliance on experts*
- d. a description of the user input that was incorporated into the catastrophe model*
- e. a description of adjustments made to the catastrophe model output*
- f. the extent of any reliance placed upon the work of another actuary “*

Further, the standard requires documentation of legal and regulatory requirements if applicable and steps taken by the actuary to comply with the standard considering proprietary information. The actuary should disclose the model used as well as any adjustments made to the model results. The standard refers the actuary to ASOP 41, Actuarial Communications, regarding the appropriate disclosures that should be included.

ASOP 41 deals with the actuary’s communications and includes guidance on documentation and disclosure. The standard requires that the appropriate records, worksheets, and other documentation of the actuary’s work should be maintained by the actuary and retained for a reasonable period of time.

Process documentation is an integral part of natural catastrophe modeling. It guarantees consistency throughout the entire workflow and is essential for the validation process. Additionally, standardized process documentation facilitates the reproducibility of the modeled losses. Apart from the advantages for the company itself several supervisory regimes (FSA, Lloyd’s of London, BaFin, U.S. Actuarial Standards Board) have increased the requirements with respect to detailed documentation of company’s modeling and analysis approach as part of the supervisory guidelines and due diligence processes.

Documentation in catastrophe modeling could include the following steps:

### 1. Pre-Analysis Phase and Log File Review

- Document the raw data file as well as any changes that were made to the raw data file to get it ready for the analysis
- Create a summary file that summarizes the exposure for review
- Document the assumptions that are made for any data changes
- Save and review the log files for data input and geocoding results
- Decide on the analysis options that coincide with the output requirement and save the screenshot of the analysis option page

### 2. Analysis Phase

- Document the version of the software being used
- Document the log file for the analysis.
- Document the steps that are used to pull the results from the software
- Document any assumptions and results for the sensitivity testing on model results

- Document any loss adjustment factors as well as the derivation on the loss adjustment factors

For best practices on additional documentation process, please refer to the document [Best Practices for Using Catastrophe Models](#).

# About Verisk Extreme Event Solutions

Verisk Extreme Event Solutions provides risk modeling solutions that make individuals, businesses, and society more resilient to extreme events. In 1987, Verisk Extreme Event Solutions founded the catastrophe modeling industry and today models the risk from natural catastrophes, supply chain disruptions, terrorism, pandemics, casualty catastrophes, and cyber incidents. Insurance, reinsurance, financial, corporate, and government clients rely on Verisk's advanced science, software, and consulting services for catastrophe risk management, insurance-linked securities, longevity modeling, site-specific engineering analyses, and agricultural risk management. Verisk Extreme Event Solutions, a Verisk (Nasdaq:VRSK) business, is headquartered in Boston, with additional offices in North America, Europe, and Asia. For more information, please visit [air-worldwide.com](http://air-worldwide.com). For more information about Verisk, a leading data analytics provider serving customers in insurance, energy and specialized markets, and financial services, please

visit [www.Verisk.com](http://www.Verisk.com).

